



OLI®




## 12 and 24 Volts DC Electric Vibrators

- ▶ Rated for continuous duty
- ▶ Water tight, hermetically enclosed
- ▶ Robust. Built to withstand tough applications



# 12 and 24 Volts DC Electric Vibrators

## Type MVE 050 D.C.

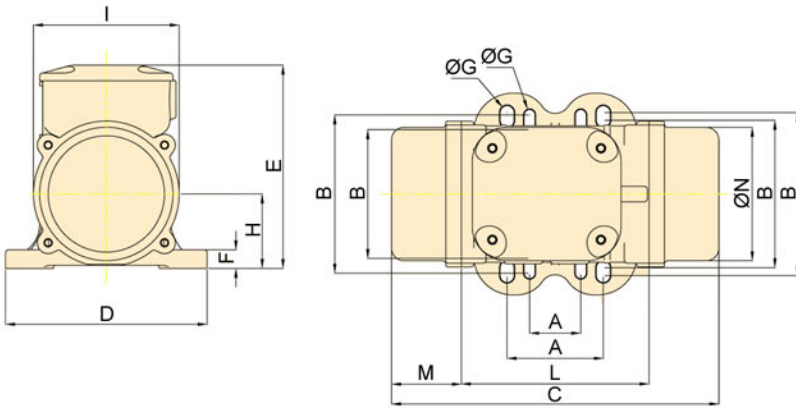


TYPE	Electrical Data				Mechanical Data					
	V	A	W	HP	Speed (r.p.m.)	C.F. max. (kg)	C.F. max. (Lbs)	Weight (kg)	Weight (lbs)	Size
MVE 050 DC 24	24	3.3	80	0.11	3120	50	110	4.4	9.7	10
MVE 050 DC-12	12	6.6	80	0.11	3120	50	110	4.4	9.7	10

Dimensions (mm)														
SIZE	A	B	C	D	E	F	Ø G	holes	H	I	L	M	N	Gland
10	62	95-106	211	130	132	10	7	4	46	94	121	45	86	M16
	33	83-102					9							

Dimensions (inches)														
SIZE	A	B	C	D	E	F	Ø G	holes	H	I	L	M	N	Gland
10	2.4	3.7-4.2	8.3	5.2	5.2	0.5	0.3	4	1.8	3.7	4.8	1.8	3.4	M16
	2.4	3.2-4.0					0.4							

## Type MVE 200 D.C.

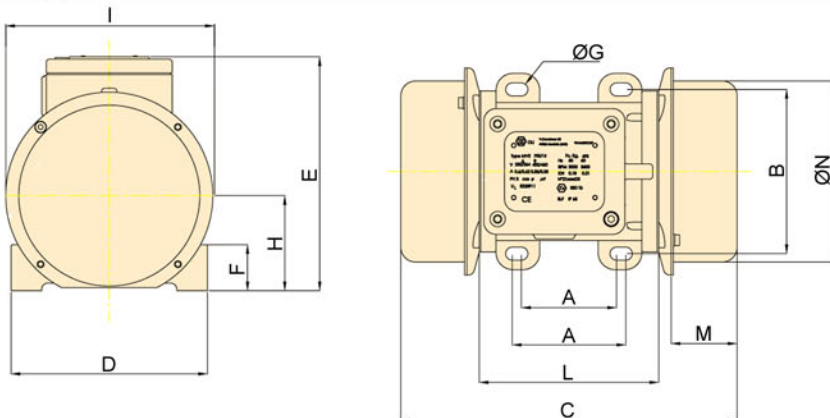

TYPE	Electrical Data				Mechanical Data					
	V	A	W	HP	Speed (r.p.m.)	C.F. max. (kg)	C.F. max. (Lbs)	Weight (kg)	Weight (lbs)	Size
MVE 200 DC 24	24	6.7	160	0.22	3120	200	437	6.5	14.3	20
MVE 200 DC-12	12	13.3	160	0.22	3120	200	437	6.5	14.3	20

Dimension (mm)														
SIZE	A	B	C	D	E	F	Ø G	holes	H	I	L	M	N	Gland
20	62-74	106	225	130	145	33	9	4	62	138	115	45	120	M16

Dimensions (inches)														
SIZE	A	B	C	D	E	F	Ø G	holes	H	I	L	M	N	Gland
20	2.4-2.9	4.2	8.9	5.1	5.7	1.3	0.4	4	2.4	5.4	4.5	1.8	4.7	M16

N.B.: Rights reserved to modify technical specifications.



OLI S.r.l.  
Via Canalazzo, 35  
I - 41036 Medolla (MO)  
ITALY

+39 / 0535 / 46 400  
fax +39 / 0535 / 46 350  
e-mail info@olivibra.it  
internet www.olivibra.it

